


REF : HYHFP cable - 32 Pair Unshielded – LSZH Sheath

Product Description: Rated temperature: 90℃ Bare solid copper conductor Rohs/REACH complied LSZH Jacket Flame Test: IEC60332-1 Installation temperature:-30℃~+50℃			10 Base-T 100 BASE-T4 Telephone Voice Wiring					
Content of the Data Sheet								
Category	HYHFP 32P-LSZH							
Test Standard	---							
1.Conductor	Material	SOLID-Bare Copper						
	Nom. O.D. (mm)	0.400	Up	+0.01mm				
			Down	-0.01mm				
2.Insulation	Material	HDPE						
	Diameter	0.71±0.03mm						
Color	Bl./Wh.-Wh./Bl. Ora./Wh.-Wh./Ora. Gr./Wh.-Wh./Gr. Br./Wh.- Wh./Br. Bl./Rd.-Rd./Bl. Ora./ Rd.-Rd./Ora. Gr./Rd.-Rd./Gr. Br./Rd.- Rd ./Br. Bl./Bla.-Bla./Bl. Ora./Bla.-Bla./Ora. Gr./Bla.-Bla./Gr. Br./ Bla.-Br.. Bl./Yel.-Yel./Bl. Ora./Yel.- Yel./Ora. Gr./Yel.-Yel./Gr. Br./ Yel.-Br.				Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)	≥10.0
			Elongation (%)	≥125				
			Aging Period (℃× hrs)	100℃×24h×7d				
			After Aging	Tensile Strength (Mpa)		≥18.0		
				Elongation (%)		≥100		
3.Rip-cord	Yes	Drain wire	TC	0.50mm				
4.Shielded	Polyester+ AL Foil							
5.Sheath	Thickness	0.85±0.4 mm						
	External O.D.	10.8±1.0 mm						
	Surface	Clean,Frap,Satiation						
	Material	LSZH(complies RoHS)						
Surface Printing	Letter height	3.0±0.3mm						
	Color	Black						
	Print error & Space	≤±0.5%, 1m						
Packing	Drum in Carton							
Packing length	500±2.5m							
Technical Performance (100m)								
Frequency (MHz)	ATT ≤dB	PS ≥dB	NEXT					
1	2.95	56.0						
4.0	5.40	47.0						
10.0	8.60	41.0						
16.0	10.70	38.0						
20.0	12.00	37.0						

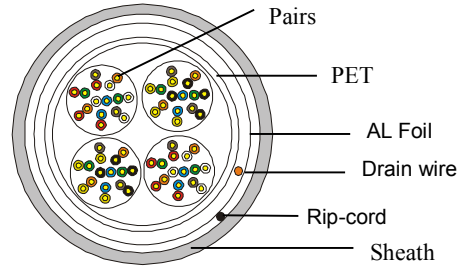

Office Add: Floor9 Zhongmao Building Yong'an Str.Wukang Town,Deqing,Zhejiang
 Tel: +0086-572-8066838 (International) +0086-572-8075609(国内贸易)
 Fax: +0086-572-8063125
 E-mail: info@zhaolong.com.cn Http: //www.zhaolong.com.cn
 Factory Add: Shilin Industrial Zone Xinshi Town,Deqing Zhejiang
 Fax: +0086-572-8475170